

OFF-STREET PARKING REQUIREMENTS						
Dimensions	Diagram	0°	45°	60°	75°	90°
Stall Width, Parallel to Aisle	A	9.0	12.7	10.4	9.3	9.0
Stall Length of Line	B	24.0	26.5	22.9	20.3	18.0
Stall Depth to Wall	C	9.0	18.7	19.8	19.6	18.0
Aisle Width Between Stall Lines	D	12.0	12.0	17.0	22.0	24.0
Stall Depth, Interlock	E	9.0	15.7	17.7	18.5	18.0
Module, Wall to Interlock	F	30.0	46.5	54.6	59.1	60.0
Module, Interlocking	G	30.0	43.5	52.4	58.6	60.0
Module, Interlock to Curb Face	H	30.0	44.7	52.4	56.9	58.0
Bumper Overhang, Typical	I	0.0	1.8	2.2	2.4	2.5
Offset	J	N/A	6.3	2.7	0.6	0.0
Setback	K	24.0	12.7	9.0	5.0	0.0
Cross Aisle, One-Way	L	18.0	18.0	18.0	18.0	18.0
Cross Aisle, Two-Way	M	24.0	22.0	22.0	22.0	22.0

For parallel parking, minimum widths and lengths shall be 9 feet by 23 feet.

OFF-STREET PARKING REQUIREMENTS DIAGRAM

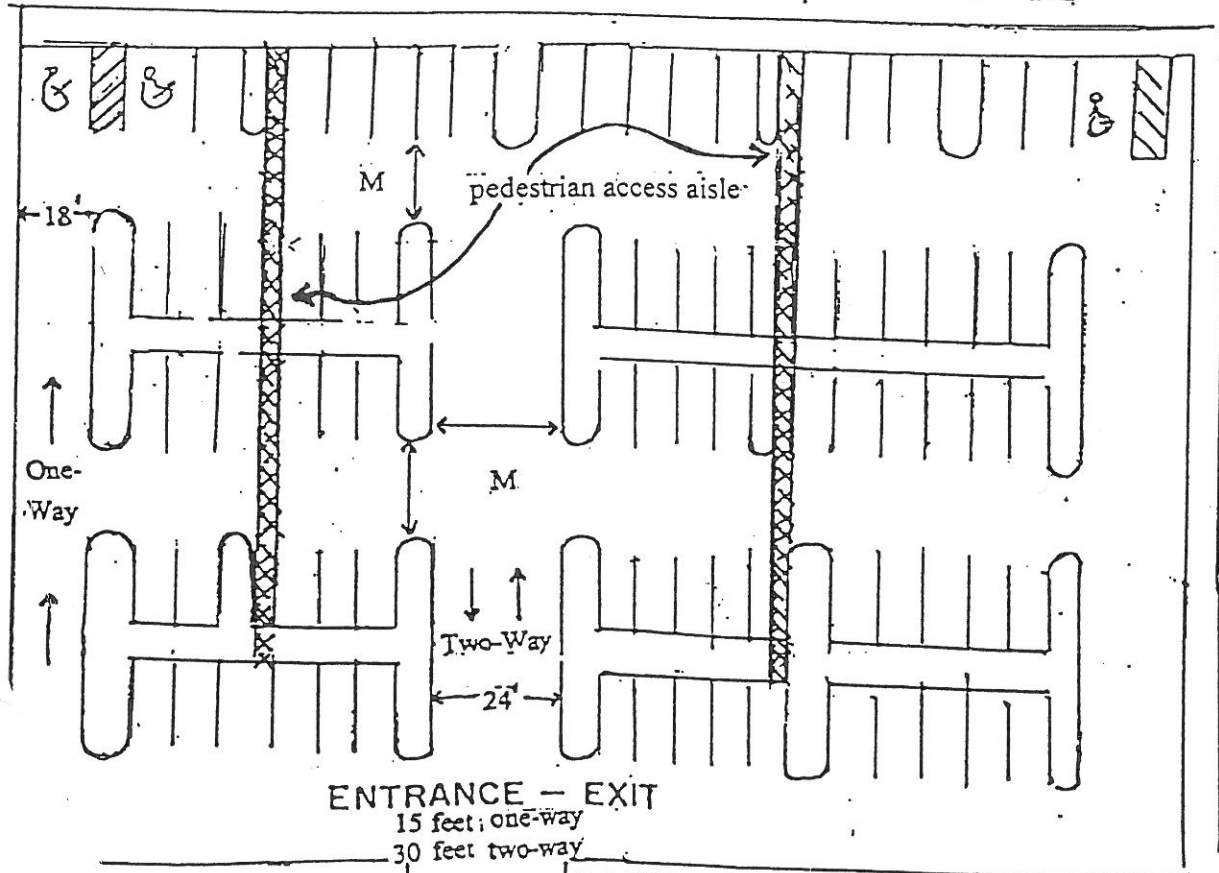
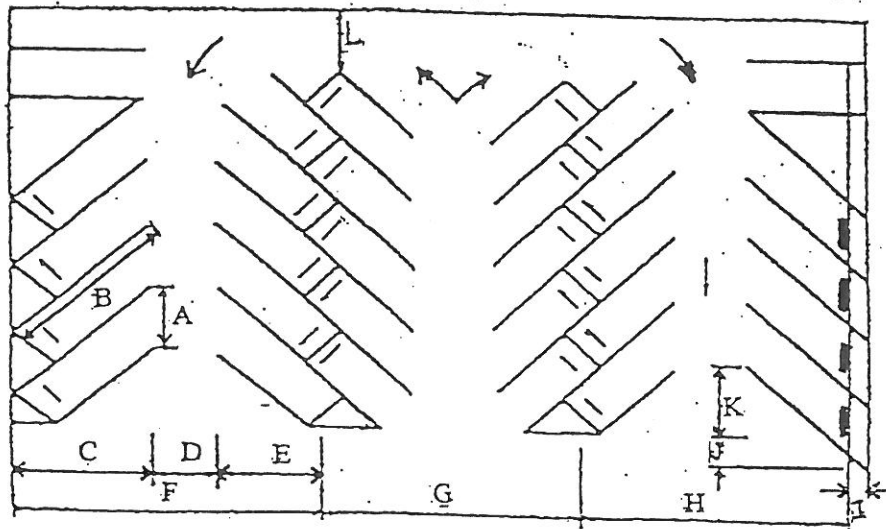


ILLUSTRATION # 1